SAFETY IN DESIGN

Safety in Design (SiD)

- Integration of hazard identification and risk assessment methods into design process
- Asking "how can we make this safer" throughout design process
- Useful life - construction, operations, maintenance, demolition

Safety in Design (SiD) Cont.

- Series of workshops during the design phase with representatives from all phases
- Comments raised and recorded in SiD register
- Comments closed out during design process
- Above the line controls
- Legislative requirement

SAFETY IN DESIGN MUST CONSIDER

Construction

Maintenance

End Users

Demolition

INFLUENCE ON SAFETY OVER TIME

As the project progresses from planning into delivery, our ability to influence safety decreases.

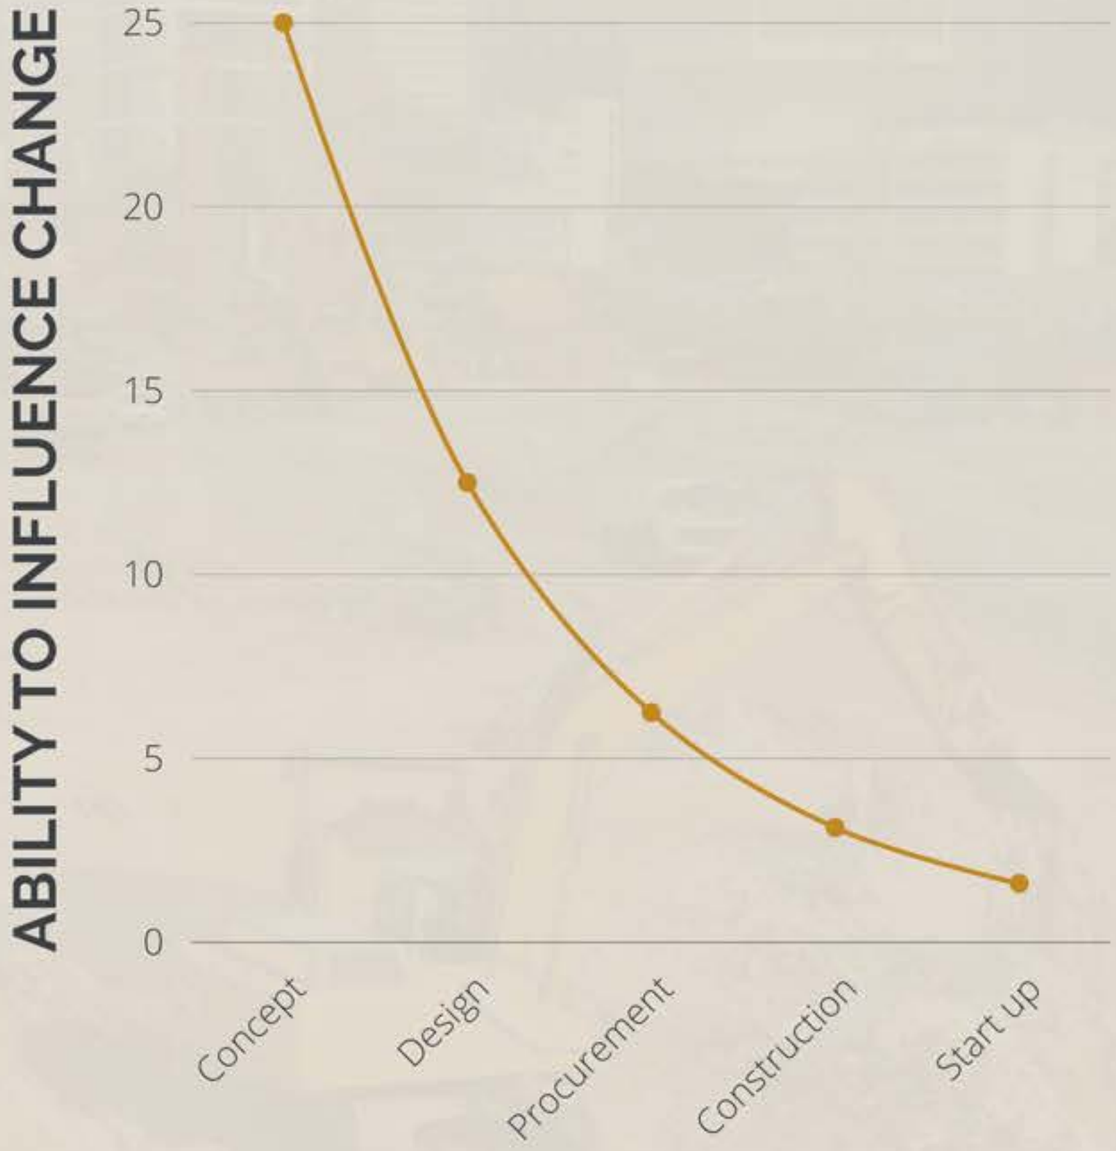

SAFETY IN DESIGN EXAMPLE

Ref	Hazard	Cause and Description	Existing Controls (If Any)	Phase	Likelihood	Consequence	Risk Level	Control Method	Likelihood	Consequence	Risk Level	Action By
1	Working at heights	Roof access for services maintenance	None	Operations	2	4	8	Include safe maintenance access points and facilities for harness on roof	2	2	4	Design
2	Excavation	Strike newly installed servies while excavating for foundations	Contractor Excavation Permit	Construction	3	4	12	Include services locations on structural drawings	2	4	8	Construction
3	Fall from heights	Member of public falls from heights while using underpass walkway	Guide walkway with signage	Operations	2	5	10	Physical balustrade along walkway to prevent public leaving walkway	1	5	5	Design
4												