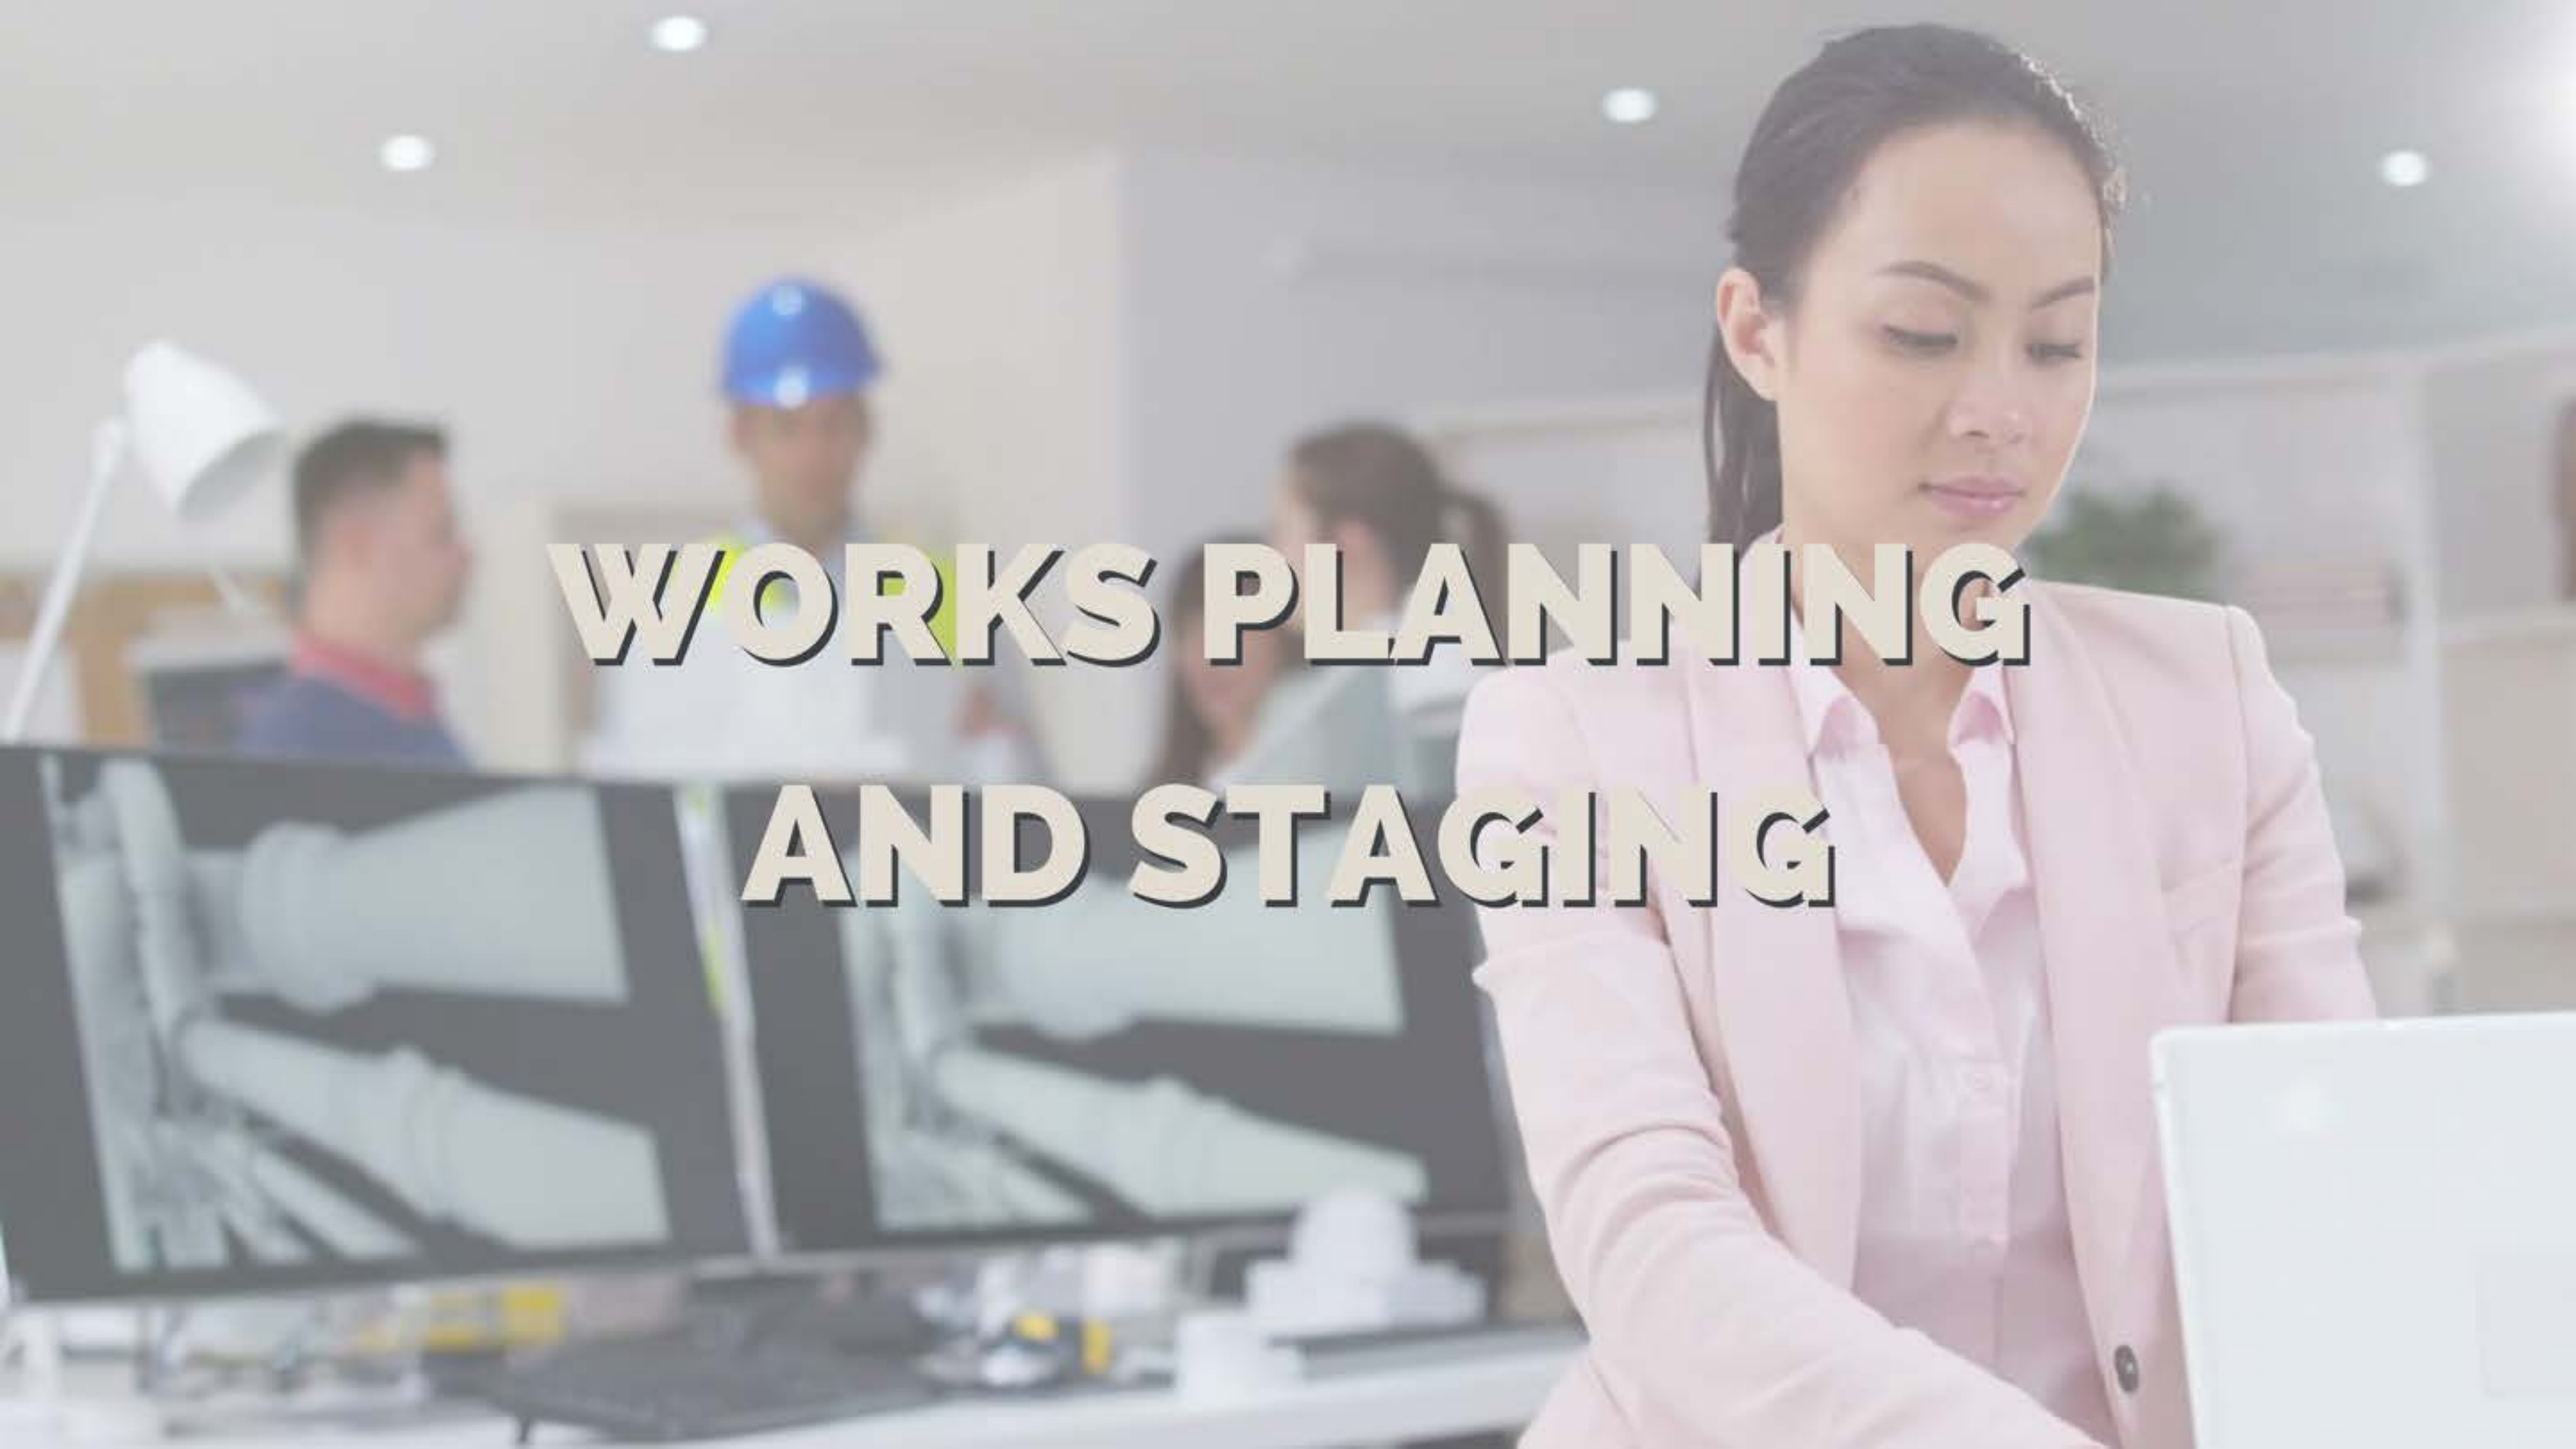

WORKS PLANNING AND STAGING

WORKS PLANNING AND STAGING

sequencing activities to minimise or eliminate safety hazards

WORK PLANNING AND STAGING

- During the development of the project, schedule consider and factor in safety risks
- Schedule developed during pre-construction
- Safety management part of schedule development

EXAMPLE

- Electrical works on foot
- Landscaping using mobile plant
- Landscaping scheduled to start after all electrical works completed
- Avoids risk of people/plant interaction

EXAMPLE

- Installing a new roof with architectural features
- Significant labour to install architectural features
- Pre-install and lift in as modular

EXAMPLE

- Constructing new substation
- As part of testing and commissioning, sections of the substation will be energized
- Ensure enough time to fully complete construction before commissioning

DEVELOPMENT

01

Identify key critical risks applicable to project scope

02

Develop schedule baseline

03

Identify what improvements can be made to eliminate or minimise risks

04

Update schedule baseline with improvements